


Skip loader SL10-MT

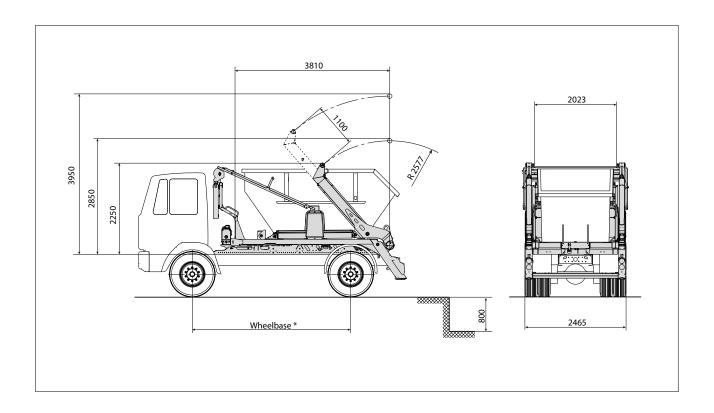

Technical data

Load	s and	weig	hts:
------	-------	------	------

Lifting load from carriageway level ** max. 11,000 kg (boom length 2,577 mm) Lifting load from carriageway level ** max. 7,000 kg (boom length 3,677 mm) Lifting load from underfloor level max. 7,500 kg (boom length 2,577 mm) Lifting load from underfloor level max. 5,300 kg (boom length 3,677 mm) Weight of the skip handler approx. 2,620 kg (standard version, pre-assembled) 800 mm

Hydraulic system:

Underfloor position

Max. operating pressure	300 bar
Oil tank capacity	26 l
Capacity of the entire hydraulic system	approx. 110 l

Suitable chassis:

Permissible total weight 12,000 - 15,000 kg approx. 3,300 – 3,600 mm Wheelbase Frame overhang 1,000 - 1,150 mm

Exact dimensions and weights are defined upon determination of the chassis.

Suitable container sizes:

- Container according to C.H.E.M. TS 14 up to 9 m³,
- Container according to C.H.E.M. TS 14 up to 12 m³,
- Compacted waste container according to C.H.E.M. TS 2 up to 10 m³
- Special containers by arrangement.

Subject to change in the course of further development!

^{**} without consideration of stability.